



# Plusrite®

## LED T8 TUBE LIGHT

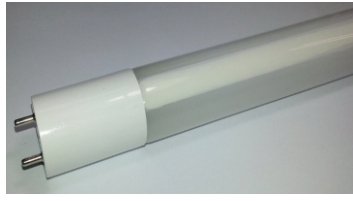

**AU02-T8-600-9W/4K/FRGL**  
**AU02-T8-600-9W/6K/FRGL**  
**AU02-T8-1200-21W/4K/FRGL**  
**AU02-T8-1200-21W/6K/FRGL**

**AU02-T8-1200-20W/40K/PIR**  
**AU02-T8-1200-20W/60K/PIR**




### TECHNICAL SPECIFICATIONS


Model.	LED TYPE	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	Rotated Cap	Motion Sensor	IP RATING	Dimmable	Cap	Warranty
<b>AU02-T8-600-9W/4K/FRGL</b>	SMD2835	48pcs	4K	100~265V	230°	9W	850lm	No	No	IP20	NO	G13	3 years
<b>AU02-T8-600-9W/6K/FRGL</b>	SMD2835	48pcs	6K	100~265V	230°	9W	900lm	No	No	IP20	NO	G13	3 years
<b>AU02-T8-1200-21W/4K/FRGL</b>	SMD2835	110pcs	4K	100~265V	230°	21W	2050lm	No	No	IP20	NO	G13	3 years
<b>AU02-T8-1200-21W/6K/FRGL</b>	SMD2835	110pcs	6K	100~265V	230°	21W	2100lm	No	No	IP20	NO	G13	3 years
<b>* AU02-T8-1200-20W/40K/PIR</b>	SMD2835	96pcs	4K	100~265V	120°	20W	1950lm	No	Yes	IP20	NO	G13	3 years
<b>* AU02-T8-1200-20W/60K/PIR</b>	SMD2835	96pcs	6K	100~265V	120°	20W	2000lm	No	Yes	IP20	NO	G13	3 years

**\*If there is motion detection, it will luminate at 100%.**  
**If there is no motion detection after 30 seconds, it will luminate at 30%.**


### Product Dimension: (mm)

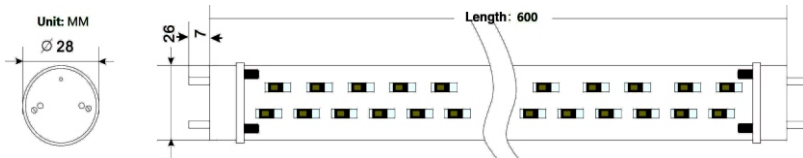

**AU02-T8-600-9W/4K/FRGL**  
**AU02-T8-600-9W/6K/FRGL**

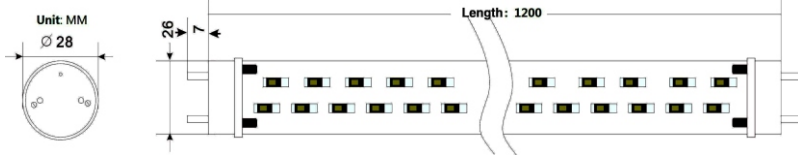

**AU02-T8-1200-21W/4K/FRGL**  
**AU02-T8-1200-21W/6K/FRGL**

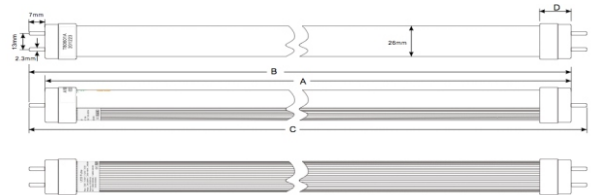

Standard Length	Dimension (mm)			
	A (MAX)	B (MAX)	C (MAX)	D (MAX)
1.2M	1198	1206	1213	26

**AU02-T8-1200-20W/40K/PIR**  
**AU02-T8-1200-20W/60K/PIR**

### PACKING DETAILS:

Product: **AU02-T8-600-9W/4K/FRGL**  
**AU02-T8-600-9W/6K/FRGL**

Net Weight: 0.23kg  
 Outer ctn size: 650\*230\*190mm  
 Q'ty per ctn: 20 pc  
 G.W per ctn: 5.4 kg

Product: **AU02-T8-1200-21W/4K/FRGL**  
**AU02-T8-1200-21W/6K/FRGL**

Net Weight: 0.4 kg  
 Outer ctn size: 1260\*230\*190mm  
 Q'ty per ctn: 20 pc  
 G.W per ctn: 8.5 kg

Product: **AU02-T8-1200-20W/40K/PIR**  
**AU02-T8-1200-20W/60K/PIR**

Net Weight: 0.4 kg  
 Outer ctn size: 1270\*220\*220mm  
 Q'ty per ctn: 25 pcs  
 G.W per ctn: 10.2 kg